



ZEON XP

ULTIMATE PERFORMANCE REDEFINED



The WARN ZEON XP has been re-engineered from the ground up, with new controls to help you push the limits and work your winch with confidence. You also get unmatched performance with best-in-class line speed and capacity. It's a durable, ultra-reliable recovery tool that's backed by the industry's leading warranty.

110100 ZEON XP 10-S
with 100' of 3/8" Spydura synthetic rope

110120 ZEON XP 12-S
with 80' of 3/8" Spydura Pro synthetic rope

110140 ZEON XP 14-S
with 80' of 3/8" Spydura Pro synthetic rope

- Dual controls – handheld corded remote plus built-in HUB wireless control give you the freedom to control the winch however and wherever you want
- All-new controls give real-time, live feedback on winch motor temperature, load, and vehicle battery condition—allowing you to be more aware of what's happening with your winch and the vehicle recovery
- Dynamic lighting: drum and accent lights change color based on winch status
- Remote activated clutch, with manual backup, makes the winch easier and faster to use
- Best-in-class line speed, superior durability, highest pulling capacity – up to 14,000 lbs.
- Ultra-reliable waterproof construction—IP68 submersion and IP69K spray rated, so it works in whatever conditions you throw at it
- Black anodized, forged aluminum fairlead with premium black Epic hook
- Equipped with WARN Spydura synthetic rope, including abrasion sleeve and red heat-resistant inner wraps
- Designed, engineered, and assembled in the USA
- Backed by Warn's industry-leading limited lifetime warranty and a U.S. based customer service team



Corded remote controls power in and out, the remote clutch, and provides user feedback through LED light display



HUB Wireless Receiver is built into the winch, allowing wireless control with your smart device and the HUB app

ZEON XP – built for the challenges you shouldn't have accepted.

HIGH-PERFORMANCE, HIGH SPEED

ZEON XP is built on the same platform as ZEON XD and shares the high efficiency motor and geartrain, to deliver a blazing fast no-load line speed of up to 40 ft/min—the fastest in its class.

LOW AMPS, HIGH POWER

OEM-grade bus bars provide highly efficient electrical connections, eliminating the exposed, inefficient wiring.

CONTROLS YOU CAN RELY ON

At the heart of the control pack is a built in HUB receiver and sensors that continuously monitor winch load, temperature, and battery voltage.



REMOTE CLUTCH

Built-in remote operated clutch is operated with the push of button. A manual clutch lever offers users a mechanical override

SUPERIOR GEAR TRAIN

The heavy-duty three-stage planetary gear train is quieter and more efficient than ever, reducing component strain to give you improved durability.

DURABLE, OEM-GRADE HARDWARE

Improved corrosion resistant black fasteners along with improved, UV resistant bus-bar covers meet the highest OEM specifications.

WATERPROOF CONSTRUCTION

Features durable O-ring rubber gaskets. This new sealing delivers a longer service life, and meets the most stringent IP68 submersion and IP69K spray testing.

BLACK ALUMINUM FAIRLEAD

Made of forged aluminum, giving superior corrosion, impact, salt, weather, and UV-resistance for long-lasting good looks.

BEST-IN-CLASS LOAD-HOLDING BRAKE

The powerful, six-segment cone brake holds the full rated load, and provides superior control while winching.


LARGE-DIAMETER ALUMINUM-ALLOY DRUM

Larger radius drum creates less stress on the rope, extending it's life. A unique through-drum attachment method is the strongest anchor on the market, and allows for easy rope replacement.

FEATURES/SPECIFICATIONS

	ZEON XP 10-S	ZEON XP 12-S	ZEON XP 14-S
Part numbers:	110100	110120	110140
Rated line pull:	10,000 lbs. (4536 kg) single-line	12,000 lbs. (5443 kg) single-line	14,000 lbs. (6350 kg) single-line
No load line speed:	40 ft/min (12.19 m/min)	31 ft/min (9.45 m/min)	26 ft/min (7.95 m/min)
Rated load line speed:	5 ft/min (1.52 m/min)	3 ft/min (.91 m/min)	2 ft/min (.64 m/min)
No load motor current:	64 Amps	67 Amps	65 Amps
Rated load motor current:	458 Amps	466 Amps	482 Amps
Motor:	12V DC, series wound (exclusive WARN high-performance design)		
Electrical controls:	Albright Contactor		
Wiring:	Automotive OE-grade bus bars		
Corrosion resistance:	408 hour salt spray		
Ingress protection:	IP68 submersion and IP69K spray testing		
Remote Control:	Corded remote with LED feedback light, plus bluetooth enabled HUB Wireless Receiver integrated into the control pack		
Geartrain:	3-stage planetary		
Gear ratio:	141:1	176:1	213:1
Clutch (freespooling):	Rotating ring gear with stainless steel clutch lever. Both manual and remote activated operation.		
Brake:	Automatic, six segment mechanical cone		
Drum diameter/Length:	3.15"/9.0" (80mm/229mm)		
Rope:	10-S: 3/8" x 100' (9.52mm x 30m) Spydura synthetic, 12-S & 14-S: 3/8" X 80' (9.52mm x 24.38m) Spydura Pro		
Fairlead:	Black anodized, forged aluminum hawse		
Recommended Battery:	650 CCA minimum for winching		
Battery leads:	2 gauge, 72" (1.83m)		
Finish:	Satin-black powder coat		
Weight:	70 lbs. (32 kg)		
Final point of assembly:	Warn facility in Clackamas, Oregon, USA		
Warranty:	Limited lifetime mechanical, 7 years electrical		

ZEON XP DIMENSIONS

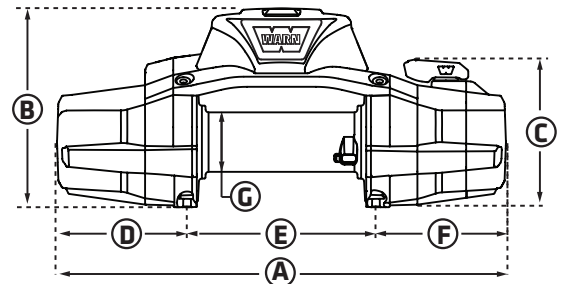

(A) 23.89" (606.7mm)	(E) 10.0" (254.0mm)
(B) 10.52" (267.2mm)	(F) 6.94" (176.3mm)
(C) 7.78" (197.7mm)	(G) 3.15" (80.0mm)
(D) 6.94" (176.3mm)	

Mounting bolt pattern: 10.0" x 4.5" (254.0mm x 114.3mm)



Warn Industries, Inc.
12900 S.E. Capps Road,
Clackamas, OR USA 97015
www.warn.com

Customer Service (North America) 1-800-543-9276
International Sales Support +1 503 722 1200