INSTALLATION INSTRUCTION



nnck GEAR - RS62138 Rear Differential Glide Plate

Fits Dana 44 (M220) Rear Axle 2020 Jeep Gladiator JT 2020-2018 Jeep Wrangler JL Rubicon

READ ALL INSTRUCTIONS THOROUGHLY FROM START TO FINISH BEFORE BEGINNING INSTALLATION

P/N	DESCRIPTION	QTY.
RS176698	Glide Plate	1
RS176923	Pinion Strap	1
RS860859	Sub Assy, JL Glide Plate Hardware	1
RS770128	Washer M8	8
RS603613	HHCS, M8-1.25 X 30mm	4
RS7649	HHCS, M8-1.25 X 40mm	2
RS603112	Nut, M8-1.25 Nylock	2
RS42702	Thread Lock	1
RS82138	Instruction	1

1) Remove four bolts from the bottom of the front differential as shown in Illustration 1. Do not remove cover.

2) Loosely attach glide plate RS176698 to the differential cover with the supplied M8x30mm bolts and washers. See Illustration 2.

3) Place pinion strap RS176923 over the rear of the differential housing. See Illustration 3.

4) Loosely attach glide plate rear of differential housing with pinion strap and M8x40mm hardware.

- 5) Snug the lower then upper differential cover bolts.
- 6) Torque the four differential cover bolts to 25 lb-ft.
- 7) Torque pinion strap hardware to 20 lb-ft.

8) Inspect cover for fluid leaks periodically. If a leak is detected, remove and reseal cover per manufacturer's recommendations.

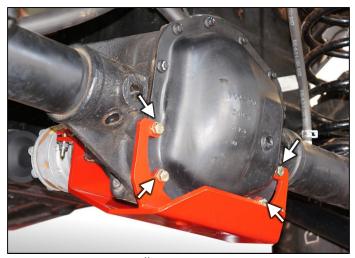


Illustration 2






Illustration 1



Illustration 3

RS82138

Rev A

www.gorancho.com Rancho Technical Department 1-800-325-8886.