



ZEON XD

THE NEXT GENERATION PREMIUM WINCH



Redesigned and retooled from the ground up for ultimate performance and durability—ZEON XD is there for the times it just has to work, in all conditions. And with the industry's best warranty, fastest line-speed, most robust waterproof sealing, and highest pulling capacity in it's class, ZEON XD is the ultra-reliable recovery tool you can count on when you need it most.

110010 ZEON XD 10-S
with 100' of 3/8" Spydura synthetic rope

110012 ZEON XD 12-S
with 80' of 3/8" Spydura Pro synthetic rope

110014 ZEON XD 14-S
with 80' of 3/8" Spydura Pro synthetic rope

- Engineered, tested, and assembled in Clackamas, Oregon, USA.
- New high-performance, high-efficiency motor and geartrain delivers blazing fast no-load line speeds of up to 40 ft/min—the fastest in its class.
- Reliable waterproof construction features o-ring rubber sealing. The entire winch is IP68 submersion and IP69K high pressure spray rated.
- Upgraded, corrosion resistant black fasteners and new, UV resistant bus bar covers meet the highest OEM-grade specifications.
- Full metal armor protects components from impact and damage.
- WARN Spydura synthetic rope is strong, lightweight, easy-to-handle, with heat-resistant inner wraps and abrasion sleeve.
- Upgraded black aluminum fairlead is made of forged aluminum, giving superior corrosion, impact, salt, weather, and UV-resistance for long-lasting good looks.
- Albright contactor control and bus bars for the ultimate in electrical reliability and efficiency.
- Available with synthetic rope in 10,000 lb., 12,000 lb., and 14,000 lb. capacities—the highest pulling capacity in its class.
- Includes a durable waterproof corded remote with 12' lead, and the HUB receiver for 100'+ range of wireless control, when paired with the WARN HUB app.
- Industry-leading warranty: Limited lifetime mechanical, seven year electrical—all backed by a global service network.



WIRELESS RECEIVER



*HUB Wireless Receiver included
(phone not included)*

ZEON XD is for those who push the limits. It's loaded with the performance features off-roaders need, and the rugged durability they want.

HIGH-PERFORMANCE, HIGH SPEED

WARN's next-generation motor and geartrain work together to deliver a blazing fast no-load line speed of up to 40 ft/min—the fastest in its class.

LOW AMPS, HIGH POWER

OEM-grade bus bars provide highly efficient electrical connections, eliminating the exposed, inefficient wiring.

CONTROLS YOU CAN RELY ON

Power is nothing without control. At the heart of the control pack is the Albright electrical contactor—proven to be the most durable and reliable winch control available.

SUPERIOR GEAR TRAIN

The heavy-duty three-stage planetary gear train is quieter and more efficient than ever, reducing component strain to give you improved durability.

WATERPROOF CONSTRUCTION

Features durable O-ring rubber gaskets. This new sealing delivers a longer service life, and meets the most stringent IP68 submersion and IP69K spray testing.

DURABLE, OEM-GRADE HARDWARE

Improved corrosion resistant black fasteners along with improved, UV resistant bus bar covers meet the highest OEM specifications.

BLACK ALUMINUM FAIRLEAD

Made of forged aluminum, giving superior corrosion, impact, salt, weather, and UV-resistance for long-lasting good looks.

BEST-IN-CLASS LOAD-HOLDING BRAKE

The powerful, six-segment cone brake holds the full rated load, and provides superior control while winching.


LARGE-DIAMETER ALUMINUM-ALLOY DRUM

Larger radius drum creates less stress on the rope, extending its life. A unique through-drum attachment method is the strongest anchor on the market, and allows for easy rope replacement.

FEATURES/SPECIFICATIONS

	ZEON XD 10-S	ZEON XD 12-S	ZEON XD 14-S
Part numbers:	110010	110012	110014
Rated line pull:	10,000 lbs. (4536 kg) single-line	12,000 lbs. (5443 kg) single-line	14,000 lbs. (6350 kg) single-line
No load line speed:	40 ft/min (12.19 m/min)	31 ft/min (9.45 m/min)	26.1 ft/min (7.95 m/min)
Rated load line speed:	5 ft/min (1.52 m/min)	3 ft/min (.91 m/min)	2.1 ft/min (.64 m/min)
No load motor current:	64 Amps	67 Amps	65 Amps
Rated load motor current:	458 Amps	466 Amps	482 Amps
Motor:	12V DC, series wound (exclusive WARN high-performance design)		
Electrical controls:	Albright Contactor		
Wiring:	Automotive OE-grade bus bars		
Corrosion resistance:	408 hour salt spray		
Ingress protection:	IP68 submersion and IP69K spray testing		
Remote Control:	Corded remote with 12' (3.7m) lead, plus HUB Wireless Receiver		
Geartrain:	3-stage planetary		
Gear ratio:	141:1	176:1	213:1
Clutch (freespooling):	Rotating ring gear with stainless steel clutch lever. Manual lever operation.		
Brake:	Automatic, six segment mechanical cone		
Drum diameter/Length:	3.15" / 9.0" (80mm / 229mm)		
Rope:	10-S: 3/8" x 100' (9.52mm x 30m) Spydura synthetic, 12-S & 14-S: 3/8" X 80' (9.52mm x 24.38m) Spydura Pro		
Fairlead:	Black anodized, forged aluminum hawse		
Recommended Battery:	650 CCA minimum for winching		
Battery leads:	2 gauge, 72" (1.83m)		
Finish:	Satin-black powder coat		
Weight:	70 lbs. (32 kg)		
Final point of assembly:	Warn facility in Clackamas, Oregon, USA		
Warranty:	Limited lifetime mechanical, 7 years electrical		

ZEON XD DIMENSIONS

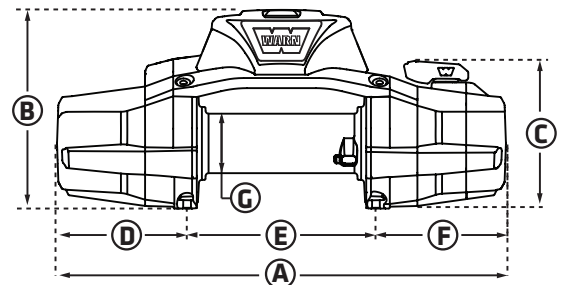

(A) 23.89" (606.7mm)	(E) 10.00" (254.0mm)
(B) 10.52" (267.2mm)	(F) 6.94" (176.3mm)
(C) 7.78" (197.7mm)	(G) 3.15" (80.0mm)
(D) 6.94" (176.3mm)	

Mounting bolt pattern: 10.0" x 4.5" (254.0mm x 114.3mm)



Warn Industries, Inc.
12900 S.E. Capps Road,
Clackamas, OR USA 97015
www.warn.com

Customer Service (North America) 1-800-543-9276
International Sales Support +1 503 722 1200